


# AISHWARYA ENTERPRISES

334/1F, Agarwal School Road, KNG Pudur Pirivu, Thadagam Road,  
Coimbatore - 641108. Mobile: 98421-35781 , 73730-35781.

## STREET LIGHT TIMER CONTROL

### Catalogue

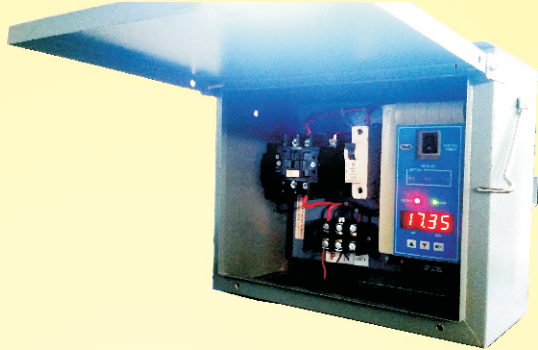


### FEATURES

1. Pre-Settable Timer for Automatic Light On-Off Control
2. User Friendly & Intuitive User Interface Design
3. Works over wide input Voltage range of 120V to 320V AC/ 50Hz
4. 20A Contact Rating @ 230V AC Load
5. Bypass Mode available to Switch ON & OFF power to the Load
6. LED to indicate Load Load Power ON or OFF
7. Street Lights ON-OFF
8. Hoarding Lights ON-OFF
9. Staircase/ Parking Lights ON-OFF
10. Relay ON indication on

# AISHWARYA ENTERPRISES

334/1F, Agarwal School Road, KNG Pudur Pirivu, Thadagam Road,  
Coimbatore - 641108. Mobile: 98421-35781 , 73730-35781.

## STREET LIGHT TIMER CONTROL WORKING & CONNECTION MANUAL

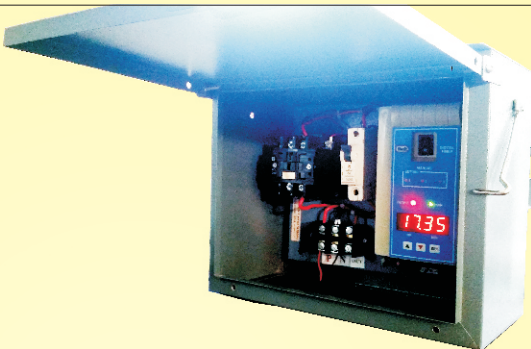

### Connection Details:

- \* Give 230V AC input in P.
- \* Give Neutral wire in N.
- \* Connect the load in Out (230v). Neutral common for Load
- \* Switch on the power supply and turn On the MCB
- \* To On the load manually put the switch in manual mode

### Setting Details:



Press The **SET** Button Once Now Timer Will Enter Into Settings Mode. Initially Clock Setting Can Be Done



Press The **UP** Button till you set the correct time in Hours



Press The **DOWN** Button to shift settings mode to MIN now set the Minutes using the **UP** button and press **SET** switch after setting the clock.



Press The **SET** Button Once Now Timer Will Enter Into **On1** Settings. Set the ON Clock time Setting



Press The **UP** Button till you set the correct time in Hours



Press The **DOWN** Button to shift settings mode to MIN now set the Minutes using the **UP** button and press **SET** switch after setting the clock.



Press The **SET** Button Once Now Timer Will Enter Into **OFF1** Settings. Set the OFF Clock time Setting



Press The **UP** Button till you set the correct time in Hours



Press The **DOWN** Button to shift settings mode to MIN now set the Minutes using the **UP** button and press **SET** switch after setting the clock.



Press The **SET** Button Once Now Timer Will Enter Into **ON2** Settings. Set the ON Clock time Setting



Press The **UP** Button till you set the correct time in Hours



Press The **DOWN** Button to shift settings mode to MIN now set the Minutes using the **UP** button and press **SET** switch after setting the clock.



Press The **SET** Button Once Now Timer Will Enter Into **OFF2** Settings. Set the OFF Clock time Setting



Press The **UP** Button till you set the correct time in Hours



Press The **DOWN** Button to shift settings mode to MIN now set the Minutes using the **UP** button and press **SET** switch after setting the clock.



Press The **SET** Button Once Now Timer Will Enter Into **ON3** Settings. Set the ON Clock time Setting



Press The **UP** Button till you set the correct time in Hours



Press The **DOWN** Button to shift settings mode to MIN now set the Min using the **UP** button and press **SET** switch after setting the clock now again set the **OFF3** time and press SET again to come out of settings mode.